

AUDIO AND CONNECTIVITY

Learn how to operate the vehicle's audio system.

Basic Audio Operation

Connect audio devices in the front console, and operate buttons and displays for the audio system.

■ USB Port

Connect a USB flash drive or other audio device, such as an iPod or iPhone®.




1. Open the USB cover.
2. Install the iPod dock connector or the USB flash drive into the USB port.

On the front panel

The USB port (2.5A) is only for charging devices.

On the back of the console compartment*1

The USB ports (2.5A) are only for charging devices.

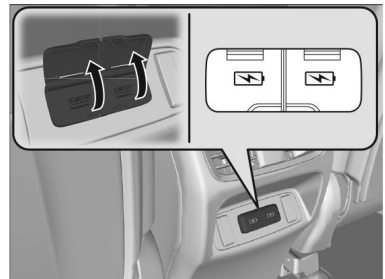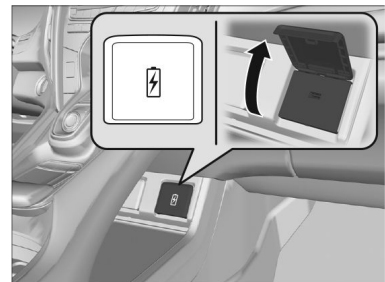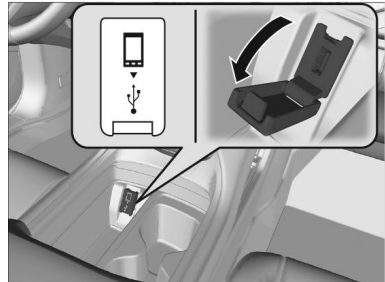


*1 - If equipped

■ Auxiliary Input Jack

Connect the standard audio devices with a 1/8 inch (3.5 mm) stereo miniplug.

1. Open the AUX cover.
2. Connect a standard audio device to the input jack using a 1/8 inch (3.5 mm) stereo miniplug.

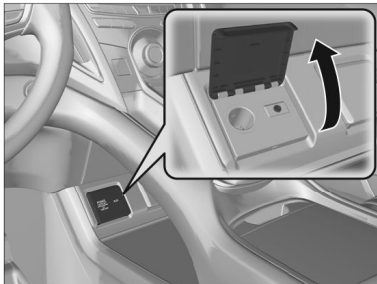

**1 - If equipped*